



Air filters



Liquid filters



Engineering

Losma / Air filters
Darwin

Mist Collector

ENG



Darwin




Losma grants that every single system is tested through strict control procedures. Every unit is provided with a Quality and Functional Test Certificate.

Darwin series is a range of centrifugal filters for cleaning air containing oil mists, micro-mists and smokes produced when using coolants (emulsion or neat oil). It can be used with a majority of machine tools for all machining processes. It is available in 4

sizes with three different, interchangeable filtration technologies. Throughputs available are from 600 to 3.000 m³/h, with different combination for increasing filtration efficiency, up to 99,97%.



Working Principles

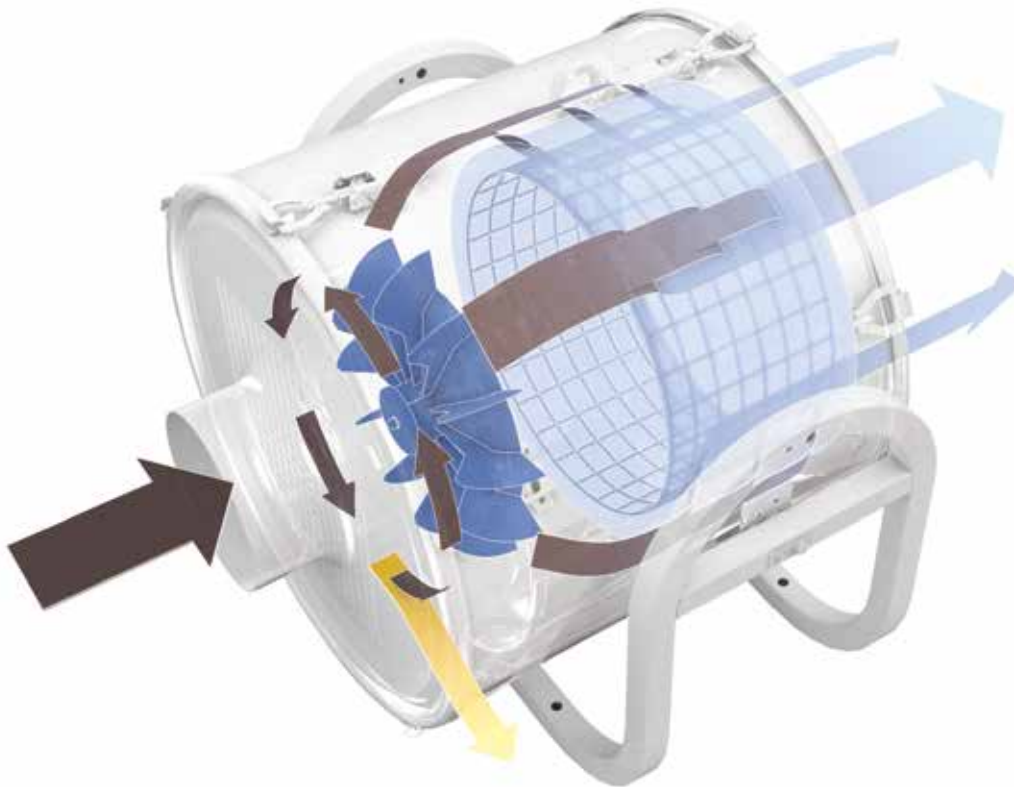

Polluted air is drawn into the system thanks to the depression generated from the rotation of the centrifuge, which gives the air a swirling movement. Air passes through the special expanded polyurethane foam inserts positioned in the centrifuge (only in mono and double version) and then into a net. The combination of all these elements facilitates the re-coalescing of oil particles – including the finer ones. Air crosses a further static filtration layer before being re-introduced into the working environment. The re-condensed liquid is eliminated through the drainage tube in constant positive pressure. Darwin series grants a filtration efficiency of over 95%, also for pollutant particles below one micron; this efficiency rate can be increased to 99,97% with the use of an absolute post-filter (HEPA FILTER) according to EN 1822 norms.



TURBINE

Suitable for surface machining (sharpeners, grinders, honing, lapping and similar finishing processes) also in the presence of heavy particulates.



MONO CENTRIFUGE


Suitable for all machining processes (emulsion or neat oil).



DOUBLE CENTRIFUGE

Suitable for all machining processes (emulsion or neat oil) in particular for heavy machining conditions such as use of high pressure which generates micro-mists and vapor's.

Plus

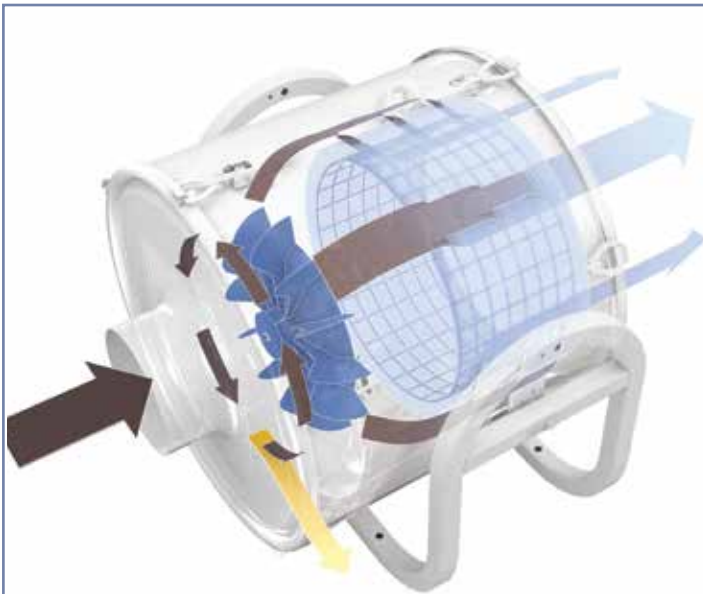

Double filtration system:

Darwin series uses a double filtration combination: dynamic (given from centrifuge rotation) and static (with integrated post-filtration system) to grant high levels of filtration.



Condensation and drainage:

Compared to the most common air filtration systems, Darwin series grants incomparable capacity of re-condensation and drainage; overpressure inside the filter is used to continuously discharge coolant which may then be collected and recycled.



Versatility and modularity:

Darwin series, unique in its category, offers 12 different combinations of filtration technologies and relative aspiration power, facilitating the choice of a suitable solution for all requirements, so avoiding energy waste caused by over-sized systems or, on the other hand, inefficiency caused by under-sized systems.



Stainless steel version:

All Darwin series models can be supplied in stainless steel, in order to be used in applications where painted steel is not ideal.



Quick and easy maintenance:


Access to the filtering section is very easy and immediate and does not require unscrewing or disassembly of any parts. Simply open the cover which is shut with pressure hooks to access the filters, which can be extracted and changed very easily and quickly.



Easy installation:

All Darwin systems can be mounted either horizontally or vertically thanks to an exclusive cradle, which allows the filter to rotate on its axis and also allows installation in very small spaces.

Technical Data

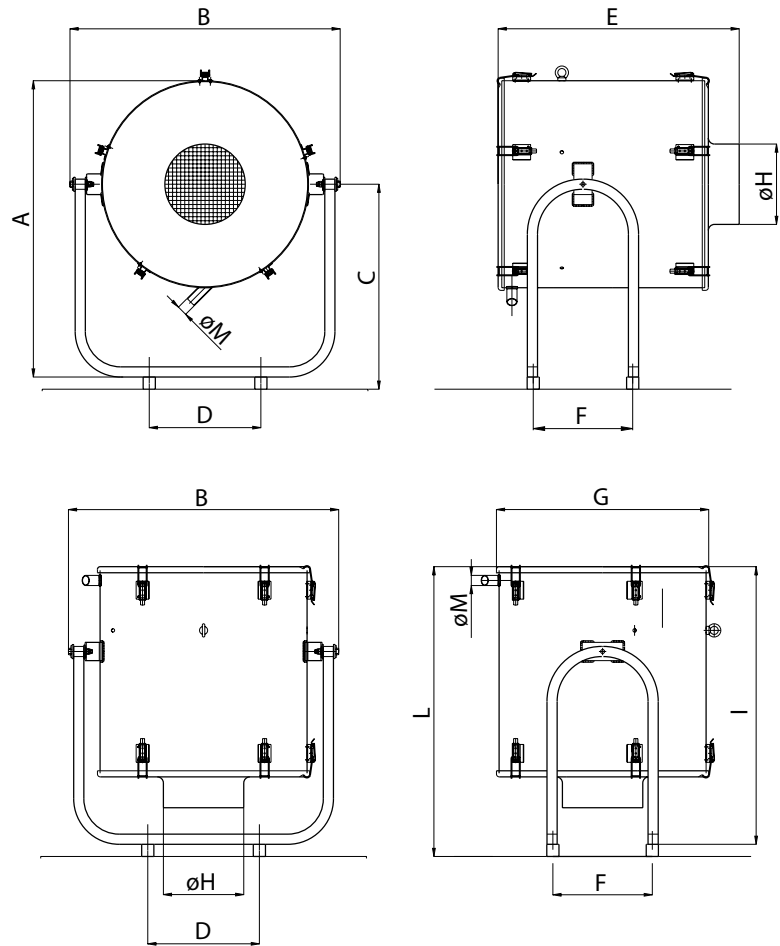

| Darwin | | | | | | | | | | | |
|--------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Models | Dimensions [mm] | | | | | | | | | | |
| | A | B | C | D | E | F | G | H | I | L | ø M |
| 600 | 487 | 457 | 300 | 180 | 324 | 170 | 365 | 100 | 382 | 412 | 25 |
| 1200 | 563 | 574 | 428 | 275 | 460 | 245 | 457 | 150 | 589 | 619 | 25 |
| 2000 | 563 | 574 | 428 | 275 | 510 | 245 | 457 | 150 | 614 | 644 | 25 |
| 3000 | 576 | 665 | 505 | 275 | 594 | 245 | 523 | 200 | 684 | 714 | 25 |

| Darwin | | | | | | | |
|--------|--------------|--------|-------------|---------|-----------|--------|------------|
| Models | Max air flow | | Noise level | ø Inlet | RPM [rpm] | | Net Weight |
| | 50[Hz] | 60[Hz] | [dBa] | [mm] | 50[Hz] | 60[Hz] | [kg] |
| 600 T | 600 | | 72 | 100 | 2800 | 3400 | 21 |
| 600 M | 600 | | 67 | 100 | 2800 | 3400 | 21 |
| 600 D | 600 | | 67 | 100 | 2800 | 3400 | 21 |
| 1200 T | 1350 | 1650 | 76 | 150 | 2800 | 3400 | 35 |
| 1200 M | 1270 | 1500 | 76 | 150 | 2800 | 3400 | 35 |
| 1200 D | 1270 | 1500 | 76 | 150 | 2800 | 3400 | 35 |
| 2000 T | 1920 | 2370 | 78 | 150 | 2800 | 3400 | 39 |
| 2000 M | 1950 | 2430 | 78 | 150 | 2800 | 3400 | 39 |
| 2000 D | 1800 | 2180 | 78 | 150 | 2800 | 3400 | 39 |
| 3000 T | 3000 | 3300 | 79 | 200 | 2800 | 3400 | 62 |
| 3000 M | 2900 | 3200 | 77 | 200 | 2800 | 3400 | 62 |
| 3000 D | 2900 | 3200 | 76 | 200 | 2800 | 3400 | 65 |

Darwin

| Electrical motor 3 phases, 2 poles, protection index IP55, F insulation class | | | | | | | | | | | | | | | |
|---|-----|----|------|----------------|-----|----|-----|----------------|----------------|-----|-----|----------------|-----|----|------|
| Power 50/60 Hz | | | | | | | | | | | | | | | |
| D600 | | | | D1200 | | | | D2000 | | | | D3000 | | | |
| kW 0.37 / 0.43 | | | | kW 1.50 / 1.75 | | | | kW 2.20 / 2.64 | | | | kW 3.0 / 3.6 | | | |
| MODEL | V | Hz | A | MODEL | V | Hz | A | MODEL | V | Hz | A | MODEL | V | Hz | A |
| T1 M1 D1 | 230 | 50 | 1.76 | T1 M1 D1 | 230 | 50 | 5.6 | T1 M1 D1 | 230 | 50 | 8.1 | T1 M1 D1 | 230 | 50 | 9,8 |
| | 400 | 50 | 1.05 | | 400 | 50 | 3.2 | | 400 | 50 | 4.7 | | 400 | 50 | 6 |
| | 265 | 60 | 1.76 | | 265 | 60 | 5.6 | | T2 M2 D2 | 265 | 60 | 8.1 | 265 | 60 | 10.6 |
| | 460 | 60 | 1.05 | | 460 | 60 | 3.2 | | | 460 | 60 | 4.6 | 460 | 60 | 6.1 |
| T3 M3 D3 | 200 | 50 | 2 | T3 M3 D3 | 200 | 50 | 6.4 | T3 M3 D3 | 200 | 50 | 9.3 | T3 M3 D3 | 200 | 50 | 12.1 |
| | 346 | 50 | 1.15 | | 346 | 50 | 3.7 | | 346 | 50 | 5.4 | | 346 | 50 | 12.2 |
| | 230 | 60 | 2 | | 230 | 60 | 6.4 | | 230 | 60 | 9.3 | | 230 | 60 | 8 |
| | 400 | 60 | 1.15 | | 400 | 60 | 3.7 | | 400 | 60 | 5.3 | | 400 | 60 | 7 |
| T4 M4 D4 | 230 | 60 | 2 | T4 M4 D4 | 230 | 60 | 5.8 | T4 M4 D4 | 230 | 60 | 8 | T4 M4 D4 | 230 | 60 | 11.2 |
| | 460 | 60 | 1.05 | | 460 | 60 | 3.2 | | 460 | 60 | 4.6 | | 460 | 60 | 6.2 |

V = Tension
 Hz = Frequency
 A = Absorbed current
 T,M,D1/T,M,D2 = Standard
 T,M,D3 = Multifrequency
 T,M,D4 = Multitension

D600



D1200



D2000



D3000



Optional



GUARD

Pre-Filtration module for swarf chips and dust, working through metallic and synthetic filtration stages. Useful to optimise the air suction efficiency in case of high production of oil mists containing dusts and metallic swarf chips.



CLIPPER H13

Provides very high filtration efficiency, up to 99,97%, following EN 1822 norms. Useful in case of micro-mists and smoke.



Installations





Health



Savings



Efficiency



Environment



Safety

F005.114.00  Greylab.it

LOSMA[®]

WORKING CLEAN, BREATHING HEALTHY

Losma S.p.A.
Via E. Fermi 16 24035 Curno (BG)
CAP. SOC. I.V. € 500.000,00
Reg. Imp. e P.I e C.F. 012345901962
R.E.A. 185685

ISO 9001
TÜV SÜD
Certified Company

ISO 14001
TÜV SÜD
Certified Company



Germany - Losma GmbH
www.losma.de

USA - Losma Inc
www.losma.com

UK - Losma UK Limited
www.losma.co.uk

Losma Engineering - Torino
www.losma.it

India - Losma India Pvt Ltd
www.losma.in